



MANUAL CALL POINTS – CONVENTIONAL

SYCALL MCP



SYCALL MANUAL CALL POINT

DESCRIPTION

SyCALL is a resettable manual call point with unique and innovative features. Professionally designed and engineered to provide maximum performance, the SyCALL is quick and easy to install, offers maximum visibility, high reliability in operation and a pleasant aesthetical appearance.

Yellow, green, blue and white versions are available on special request.


FEATURES

- Approved to EN54-11
- 2 Year warranty
- 470 Ohm and 680 Ohm fire resistors built in as standard
- High impact-resistant ABS material
- Multiple functions for different applications
- Different mounting options



ACTIVATION INDICATOR

A reflective polyester indicator appears at the bottom of the operating face, providing a highly visible indication of operation. A spring-free mechanism is used to operate the indicator and the switch via a patented design. This allows long-life and trouble-free operation.



LED INDICATOR

An LED will brightly illuminate a circular symbol in the centre of the operating element. Based on a special light pipe, this innovative design provides very high visibility of an alarm condition.




VISIBLE IN THE DARK

A special photoluminescent pigment in the white plastic operating window makes the SyCALL call point easily identifiable in the dark.



MANUAL CALL POINTS – CONVENTIONAL

SYCALL MCP

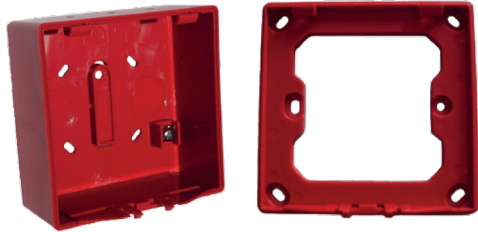

MOUNTING OPTIONS

The SyCALL can be mounted directly to a wall using the backbox, or by fastening it to a general-purpose installation box with the flush-mounting plate.



QUICK AND EASY INSTALLATION

The SyCALL simply snaps into place by pressing it without the need for fixings or tools. The “NOT IN USE” label is easily removable.



SIDEWAYS VISIBILITY

The special light pipe design allows the alarm condition to be viewed over a 170° wide-angle, thereby providing the highest level of visibility.



SAFETY COVER

The optional transparent hinged cover protects the SyCALL against accidental operation but allows easy operation in an emergency.



RESETTABLE

The SyCALL resets easily with the special key provided. This allows restoring the call point to the normal operating condition with a simple twist action. The same key is used to remove the SyCALL from its mounting and access the electrical connections.

MEASUREMENTS

H x W x D 85 x 85 x 65 mm

ORDERING INFORMATION

Product Code	Product Description
SF-MCP-RF	SyCALL MCP, Resettable, LED, Dual Resistor, Red, Flush Mount
SF-MCP-R	SyCALL MCP, Resettable, LED, Dual Resistor, Red, Surface Mount
SF-MCP-PF	Transparent Protective Flap for SF-MCP SyCALL

• **DISCLAIMER:** Although the contents of our product literature have been prepared with the greatest care, Technoswitch can accept no liability whatsoever for any direct or indirect damages of any kind that may arise due to either errors or omissions in them, or amendments to products or other specifications following publication. © Technoswitch (Pty) Ltd



HEAD OFFICE — JOHANNESBURG
Cussonia Park, 3 Ridge Road, Laser Park, Johannesburg T +27 (0)11 794 9144 E info@technoswitch.co.za
CAPE TOWN T +21 948 4575 DURBAN T +27 (0)31 266 8843

www.technoswitch.co.za

Document: DS-SF-MCP SyCALL 210831 E & OE