



MANUAL CALL POINTS – CONVENTIONAL

SENSOMAG MCP



**SENSOMAG
SURFACE MOUNTED
CALL POINT WITH LED**

DESCRIPTION

The SensoMAG-MCP manual call point is designed to work with conventional fire alarm systems. The call point has a resettable flexible working element to ensure reliable and safe operation.

The LED indication informs the user of fire and test events.

FEATURES

- EN54 Approved
- 2 Year Warranty
- LED Indication
- Optional Transparent Flap
- Compatible with
 - ORYX Conventional Fire Panel range
 - TC800 and TC800 Plus Fire Panel ranges




MANUAL CALL POINTS – CONVENTIONAL


SENSOMAG MCP

TECHNICAL SPECIFICATIONS

Operating Voltage	9VDC - 30VDC
Nominal Operating Voltage	24VDC
Current Consumption in Alarm State	23mA / 15V 38mA / 24V 48mA / 30V
Installation Wires	0.4 mm ² to 2.0 mm ²
Operation Temperature	-10°C to +60°C
Relative Humidity	≤93 % @ +40°C
Flexible Element Type	A
Material (plastic), Colour	ABS, Red
IP Rating	IP40
Dimensions (incl. base) (mm)	90 x 57 x 90
Weight (incl. base)	150g



CONNECTION DIAGRAM

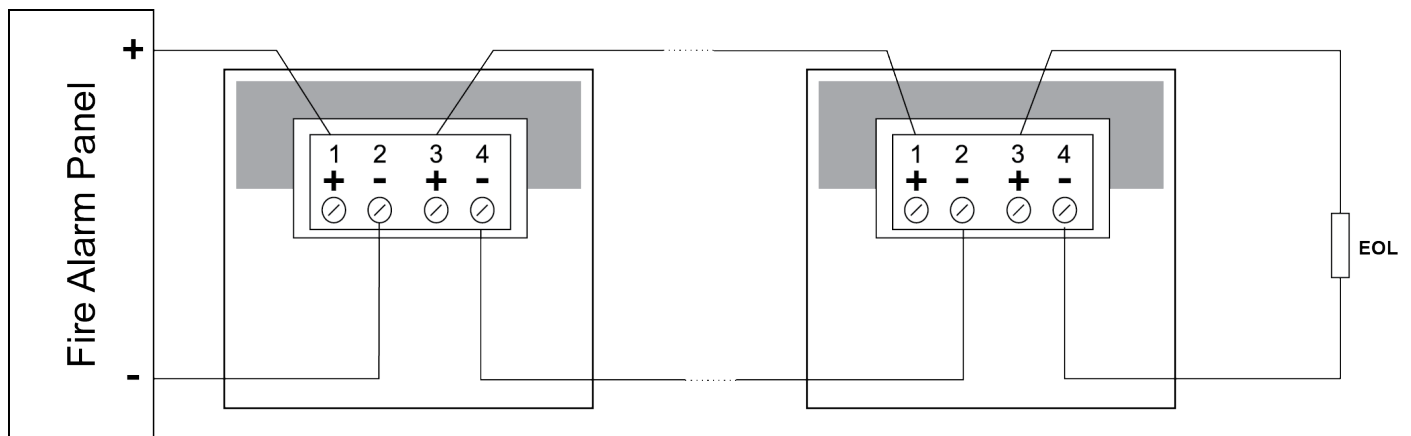

ORDERING INFORMATION

Product Code	Product Description
TE-SensoMAG-MCP	SensoMAG Surface Mounted Call Point with LED
TE-SensoMAG-MCPC5	Protective Plastic Cover for Sensomag MCP (5 Pack)
TE-SensoMAG-MCPK5	Spare Keys for Sensomag MCP (5 Pack)

• **DISCLAIMER:** Although the contents of our product literature have been prepared with the greatest care, Technoswitch can accept no liability whatsoever for any direct or indirect damages of any kind that may arise due to either errors or omissions in them, or amendments to products or other specifications following publication.
© Technoswitch (Pty) Ltd



HEAD OFFICE — JOHANNESBURG
Cussonia Park, 3 Ridge Road, Laser Park, Johannesburg T +27 (0)11 794 9144 E info@technoswitch.co.za
CAPE TOWN T +21 948 4575 DURBAN T +27 (0)31 266 8843

www.technoswitch.co.za

Document: DS Sensomag-MCP 201102 E & OE