



# LINEAR HEAT DETECTION SECURITON SecuriHeat

## FIRE DETECTION UNDER THE MOST DIFFICULT CONDITIONS

### SECURIHEAT LHD ADVANTAGES

- Resistant to harsh outdoor conditions
- Doubling of the available monitoring area thanks to second sensing tube
- VdS approval for all EN 54-22 classes, plus UL and FM
- DIN EN 54-22 Approved
- Elimination of false alarms thanks to DHW algorithm (Dynamic Heat Watch)
- Minimal maintenance due to fully automatic system monitoring
- Maximum safety for man and machine
- Developed in Switzerland, made in Germany

### SECURIHEAT LHD APPLICATIONS

- Vehicle storage halls
- Loading platforms
- Road tunnels, underground/rail tunnels and cable tunnels
- Food processing industry, industrial kitchens, bakeries
- Alcohol processing, distilleries
- Chemical industry, refineries, oil tanks
- Paint shops
- Waste incineration plants, plus many more

 **SECURITON**



**TECHNOSWITCH**  
FIRE DETECTION & SUPPRESSION



## Decades of experience combined with state-of-the-art technology.

### Where physics and intelligence come together.

Danger is never far away in locations where fires are possible, with human life, assets and data being put at risk. Securiton has decades of experience in the area of fire detection and fire alarm systems.

Developed in Switzerland and manufactured in Germany, our systems set the benchmark for the entire industry. Thousands of customers from around the world rely on the cutting-edge technology offered by Securiton.

The SecuriHeat ADW 535 comes into its own where conventional fire detectors reach their physical limits. It copes well with both extreme temperatures and constantly high atmospheric humidity, whilst precise measurements are also possible when corrosive gases and contaminated air are present.

The line-type heat detector comes with an intelligent signal evaluation, which offers a perfect combination of state-of-the-art sensors, processors and programming expertise. The result is effective fire protection with a minimum of effort.

### Advantages of the SecuriHeat ADW 535

- Non-stop monitoring thanks to line-type principle
- Resistant to harsh outdoor conditions
- Minimises maintenance thanks to fully automatic monitoring
- Provides optimal response behaviour with rate-of-rise and maximum evaluation in any application
- Offers a programmable pre-signal





### Double Tube – doubling the monitoring area.

Many fires cause sharp increases in ambient temperatures. When this happens, the volume of heated air expands. With the SecuriHeat ADW 535 heat detector, Securiton uses this physical principle to its advantage. Air-filled sensing tubes are laid in the room to be monitored. If the temperature increases, then an electronic sensor registers the pressure increase of the air inside the tube. The cable terminal processor interprets these pressure increases and triggers an alarm immediately as soon as a defined limit has been exceeded.

Two sensing tubes (Double Tube) can be connected to the SecuriHeat ADW 535. This means that the monitoring area is doubled and the system can be optimally adjusted according to the area and applicable installation guidelines. Dangers are detected quickly and reliably by each of the sensing tubes. Interventions can then be made efficiently and with pinpoint accuracy. Further advantages include the space savings and price.

### SecuriHeat ADW 535 – better measurement

- Configurable response behaviour
- Resistant to external influences
- Maximum utilisation of the available monitoring area thanks to Double Tube
- VdS approval for EN 54-22, classes A1I, A2I, BI-GI and FM/UL
- HDx (heavy-duty) version with ATEX approval available



# Sophisticated technology cannot be deceived.

## Uncompromisingly precise – not only in good weather and at room temperature.


Whether in vehicle storage halls, production facilities or tunnels, measurement in ideal conditions is not always possible. On the contrary, corrosive gases, extreme humidity, high temperatures and air contamination often make error-free temperature measurements a real challenge.

Thankfully, users can rely on the SecuriHeat ADW 535 heat detector – without ifs or buts. The sensing tubes are made from robust materials such as copper, stainless steel or Teflon, whilst the cable terminal processor is protected against corrosion and perfectly shielded from both mechanical and chemical influences. Fail-safe operation is thus guaranteed,

even when the prevailing conditions are extremely poor. ADW 535 can thus be used without restriction in locations where conventional fire detectors would not be able to cope.

### ADW 535 – where robustness pays off

- Wide temperature range up to several hundred degrees Celsius (depending on application/sensing tube)
- Available as standard and HDx (heavy-duty, explosion-proof) versions
- Copper, stainless steel or Teflon sensing tubes, depending on area of application
- Resistant to mechanical and chemical influences
- Protected against corrosion, dust and contamination

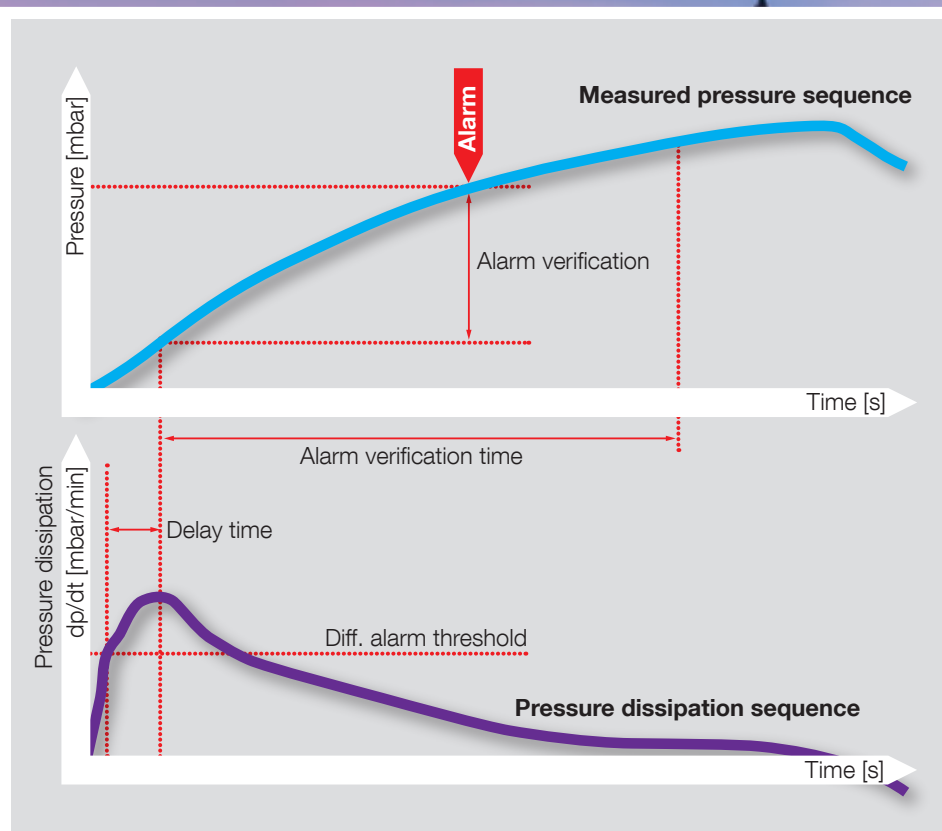

### Dynamic Heat Watch – the algorithm against false alarms.

A false alarm is an alarm that is correctly triggered by a sensor impulse, but where there is no actual danger. Brief temperature increases may occur when a gate is opened in a warehouse, for example. The intelligent DHW (Dynamic Heat Watch) algorithm on the ADW 535 ensures that events of this kind are filtered out and not transmitted further as an alarm. Whilst this filter function is a technological milestone, it must be able to differentiate between false alarms and real dangerous situations with 100% reliability.

The system is optimally protected against failures: Using a booster pump, a test motor generates a defined overpressure in the sensing tube at specific intervals. If the registered pressure increase deviates from the saved default value (e.g. due to a leak or crushed tube), then the computer immediately triggers a malfunction.

### The ADW 535 cannot be deceived

- Intelligent alarm verification with DHW technology (Dynamic Heat Watch)
- Individually programmable response behaviour with rate-of-rise and maximum evaluation
- Traceability of pressure values and events for troubleshooting (saved on SD card inside the device)





## Maximum fire protection with minimal effort.

### SecuriHeat ADW 535 – simple planning and commissioning.

The ADW HeatCalc software tool from Securitron allows the planning of security systems at a very early stage. With this tool, you can sketch the tube layout with just a few clicks of the mouse with the assistance of the program. The software ensures that your system offers you maximum benefits whilst complying with the relevant standards. HeatCalc creates a detailed report for the plant documentation containing the calculated device configuration and a parts list for ordering the necessary components.

Simple systems can be configured directly on the device without using a PC – EasyConfig will guide you here through the individual steps. The practical ADW Config software tool is used for more complex systems and application-specific adaptations. Extensive analysis functions and setting options ensure safe, cost-effective operation of your system. The uniformity of both software tools is another advantage. The device configuration calculated by ADW HeatCalc can be saved as a file directly in the device via ADW Config.

### SecuriHeat ADW 535 – unobstructed planning

- ADW HeatCalc software for efficient planning
- Simple import of the project file to the device
- VdS approved software for optimised solutions
- Simple commissioning possible directly on the device
- Complete device set-up and analysis functions via ADW Config software through Ethernet access



### Perfect security works in the background.

The quality of a fire alarm system only becomes apparent in everyday use. The technology should not replace humans, but instead take over monotonous monitoring tasks and rule out human error. SecuriHeat ADW 535 is the ideal solution here. The permanent self-diagnosis, maximum protection from false alarms and precise setting options ensure problem-free operation year on year, and all without human intervention.

If something happens, then the system is there to ensure non-stop, well-ordered detection. All data is recorded on an SD card in the device and can be evaluated at a later date, both for system optimisation and also reconstructing damage that has occurred. The Ethernet connection allows both remote configuration and the real-time visualisation of the measured values.

#### SecuriHeat ADW 535 – for minimising effort

- No monitoring outlay in daily operations thanks to fully automatic check routines
- Remote inquiry via RS485 or Ethernet connection
- Complete integration in SecuriFire fire detection systems or relay connection to third-party systems
- Logging of all events on SD cards, can be called up at any time over the Internet





# LINEAR HEAT DETECTION SECURITON SecuriHeat

## JOHANNESBURG – HEAD OFFICE

Cussonia Park, 3 Ridge Road  
Laser Park, Johannesburg, 2170  
South Africa

**T** +27 (0)11 794 9144

**E** [info@technoswitch.co.za](mailto:info@technoswitch.co.za)

**GPS** -26.078824, 27.920198

## CAPE TOWN

Tyger Terraces II  
Block 2B, DJ Wood Street  
Bellville Business Park, Bellville, 7530

**T** +27 (0)21 948 4575

**GPS** -33.900347, 18.609960

## DURBAN

Colchester Building  
Essex Gardens Office Park  
1 Nelson Road, Westville, 3629

**T** +27 (0)31 266 8843

**GPS** -29.830878, 30.950067



■ **DISCLAIMER:** Although the contents of our product literature have been prepared with the greatest care, Technoswitch can accept no liability whatsoever for any direct or indirect damages of any kind that may arise due to either errors or omissions in them, or amendments to products or other specifications following publication.  
© Technoswitch (Pty) Ltd

[www.technoswitch.co.za](http://www.technoswitch.co.za)

Document: BR SecuriHeat ST-ADW-535 200313 E & OE