



HEAT & SMOKE DETECTORS – CONVENTIONAL **SENSOMAG INDOOR SOUNDER/BEACON**



**SENSOMAG
INDOOR SOUNDER/BEACON**

FEATURES

- No programming
- Easy installation
- Single tone
- Powerful sound
- Plenty of room for cabling
- Simple and compact design
- BOSEC Certified

DESCRIPTION

The TE-SensoMAG-SBR is a cost-effective indoor sounder beacon with one tone. The sounder has one input for connection to a conventional fire alarm panel. The unit is compact and suitable for installation on plain surfaces.


Mounting is simple – no disassembling of the sounder's body parts is required, and fixing is done with a single screw.

Ideal for use with the TC800 range of panels.



HEAT & SMOKE DETECTORS – CONVENTIONAL SENSOMAG INDOOR SOUNDER/BEACON

DIMENSIONS

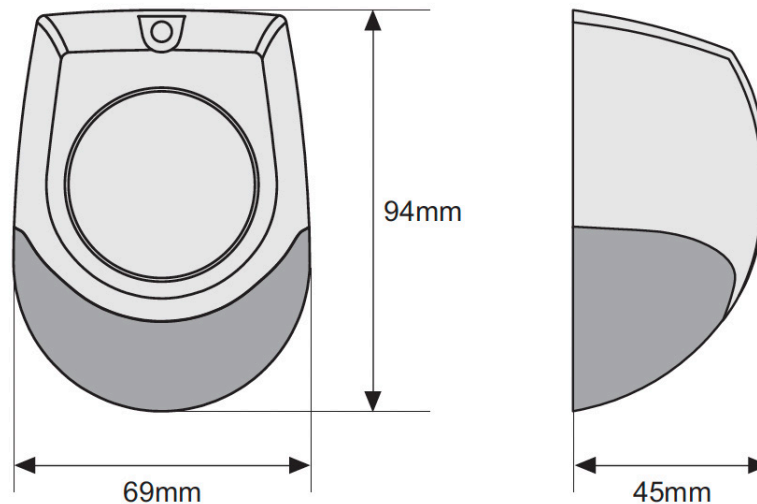

SPECIFICATIONS

Operating Voltage Range	16 – 29 V DC
Maximum Current	75 mA @ 24 V DC
Maximum Sound Output	102 dB @ 1m
Frequency Range	2.7 – 4 kHz
Frequency of Strobe Flashing	2 Hz
Type of Tone	Monotone
Colour LEDs	Red
Material/Colour	ABS/Red
Dimensions	94 x 45 x 69 mm
Temperature	– 10° to +55°C
Humidity	(93±3)%@+40°C
Cable	0.1 – 1.5 mm ²
Weight	77 g
IP Rating	IP21C

ORDERING INFORMATION

Product Code	Product Description
TE-SensoMAG-SBR	SensoMAG Sounder/Beacon Red, Indoor

• **DISCLAIMER:** Although the contents of our product literature have been prepared with the greatest care, Technoswitch can accept no liability whatsoever for any direct or indirect damages of any kind that may arise due to either errors or omissions in them, or amendments to products or other specifications following publication. © Technoswitch (Pty) Ltd



HEAD OFFICE — JOHANNESBURG
Cussonia Park, 3 Ridge Road, Laser Park, Johannesburg **T** +27 (0)11 794 9144 **E** info@technoswitch.co.za

www.technoswitch.co.za

Document: DS TE-SensoMAG-SBR 20231120 E&OE