



FIRE CONTROL PANELS – INTELLIGENT ESPRIT REPEATER PANEL



ESPRIT INTELLIGENT
REPEATER PANEL

DESCRIPTION

The ESPRIT intelligent repeater panel displays information from ESPRIT fire panels situated at a remote location.

The networked repeater's compact styling makes it ideal for all small and medium site requirements. A large graphical display accommodates an easy-to-navigate menu system.

FEATURES

- Large graphical display
- All events reported for entire network
- Remote control of evacuate, mute buzzer, silence and reset
- Externally powered from main control panel
- Programmable company logo
- Robust metal enclosure
- 3-year warranty



KM 663489
BS EN 54-2 & 54-4





FIRE CONTROL PANELS – INTELLIGENT ESPRIT REPEATER PANEL

SPECIFICATIONS

GENERAL

Enclosure

Cabling

Temperature range

Maximum relative humidity

Approx. dimensions of panel

Steel IP30. Epoxy powder coated Interpon Radon, silver grey.

Fire resistant screened cable, minimum size 1 mm².


Max cable length 1 Km (20 Ohm).

FireBurn, FP200 or equivalent (max capacitance 1uF, max inductance 1 millihenry).

–5°C to +40°C

95%

306×206×58 mm (W×H×D)

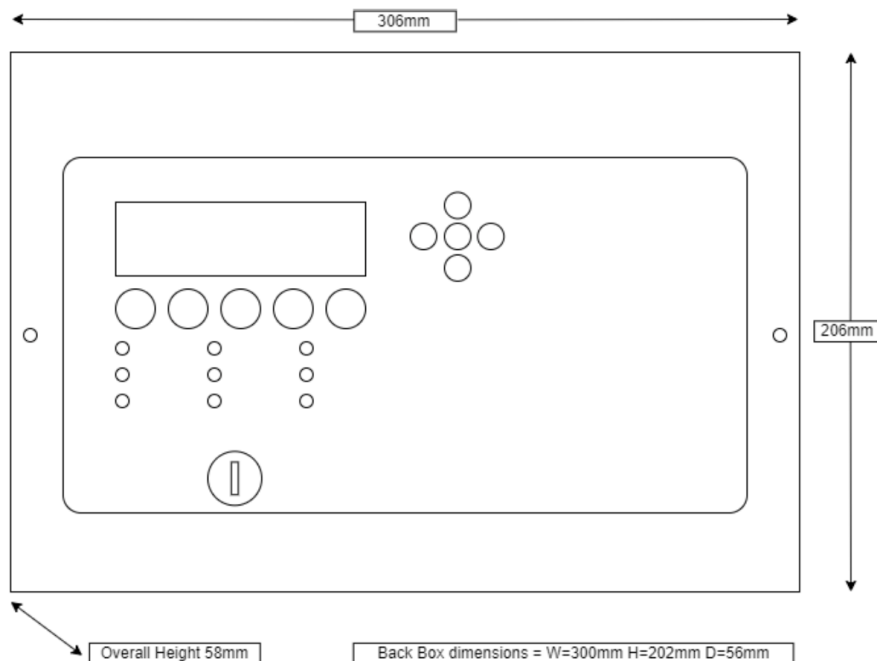

ORDERING INFORMATION

Product Code

HA-ESA-REP

Product Description

ESPRIT Addressable Repeater

• **DISCLAIMER:** Although the contents of our product literature have been prepared with the greatest care, Technoswitch can accept no liability whatsoever for any direct or indirect damages of any kind that may arise due to either errors or omissions in them, or amendments to products or other specifications following publication.

© Technoswitch (Pty) Ltd



HEAD OFFICE — JOHANNESBURG
Cussonia Park, 3 Ridge Road, Laser Park, Johannesburg **T** +27 (0)11 794 9144 **E** info@technoswitch.co.za
CAPE TOWN **T** +27 (0)21 948 4575 ■ **DURBAN** **T** +27 (0)31 266 8843

www.technoswitch.co.za

Document: DS ESPRIT HA-ESA-REP Repeater 20250304 E & OE